



HIGH SECURITY SAFE
FOR THE PROTECTION
OF CASH AND
VALUABLES AGAINST
BURGLARY ATTACKS
AND FIRE



GUARDIAN SAFE

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Overall body thickness 100mm consist of inner and outer plates enclosing a seamless casting of Chubb safes CENTRIX III specially formulated barrier material, provides formidable barrier to potential attacks.
- Overall door thickness of 212mm with an effective thickness of 100mm filled with Chubb safes CENTRIX III specially formulated steel fibre barrier material to increase overall strength.
- Door is secured by 3-way moving steel bolts measuring 32mm in diameter. A full length docking bolt secure the back edge of the door.
- Fitted with a 3-wheel Keyless Combination Lock and a 11-lever Key Lock, with non detachable key bits as standard. Both locks are protected by a Glass Relocker. The relockers are further protected by drill resistant hard plates. An additional 'Live' relocker is fitted for further protection.
- Fire Resistance tested to a level corresponding to the Japanese Industrial Standard JIS S1037 - 1981 with fire resistance for up to 90 minutes.
- A Polyurethane base paint finish is used to coat the body and door. The paint is scratch resistant and durable.

BY **GUNNEBO**

WENGENG OA SALES & SERVICES / TEL: 018-207 0021, 03-8063 8200 / WEBSITE:<https://safebox2u.com.my/>


Chubb safes
Trusted the world over.

GUARDIAN SAFE

PRODUCT SPECIFICATIONS

size	(A) Ext height (mm)	(B) Ext Width (mm)	(C) Ext Depth (mm)	(D) Clear depth over furniture	(F) Int Height (mm)	(G) Int width (mm)	(H) Int depth (mm)	(I) Door swing	(J) Depth with door at 90°	(K) Width when door at 180°	Nett weight (kg)	Gross weight (kg)	Capacity (Litres)
1	1100	743	830	915	900	543	546	658	1530	1379	990	1065	267
2	1286	743	830	915	1086	543	546	658	1530	1379	1140	1221	322
3	1472	743	830	915	1272	543	546	658	1530	1379	1267	1352	377
4	1657	743	830	915	1457	543	546	658	1530	1379	1430	1520	432

* (E) Furniture projection 85mm / (L) Internal drawer height 130mm

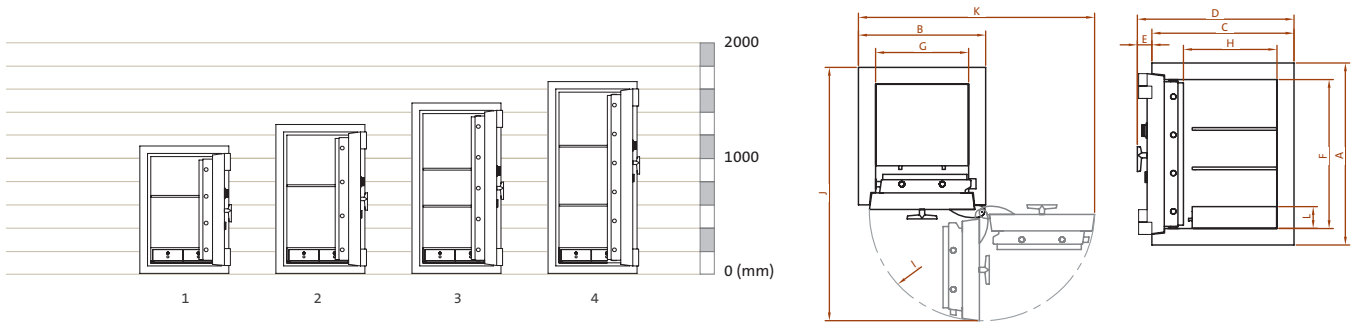

STANDARD LOCKS



KEY LOCK

Secured by one 11-lever double bitted Key Lock from Germany is fitted as standard.




COMBINATION LOCK

Secured by one 3-wheel Keyless Combination Lock as standard. Capable of 1,000,000 changes of code. The code can be changed easily and security can be maintained over the safe whenever there is a change of staff.

INTERNAL FITTINGS

The safes comes with a standard adjustable shelf and internal drawers secure by a key lock.

LOCK OPTIONS



ELECTRONIC LOCK



GSL 1000 LOCK

Electronic lock with multiple user, audit trail and time lock function

OPTIONS

NIGHT DRAWER TRAP (NDT)

For night deposit with "Anti-Fishing Plate"
 Drawer Clear Opening: 239mm(W) x 153mm(H) x 125mm(D)
 Night Drawer Trap External Height: 254mm

ENVELOPE SLOT

Envelope slot on the top of the safe for night deposit with "Anti-Fishing Plate". Slot size 13mm(W) x 152mm(L)

WENGENG OA SALES & SERVICES

No. 8, Jalan BP 6/13,
 Bandar Bukit Puchong,
 47100 Puchong, Selangor.
 TEL: 018-207 0021/ 03-8063 8100
<https://safebox2u.com.my/>